

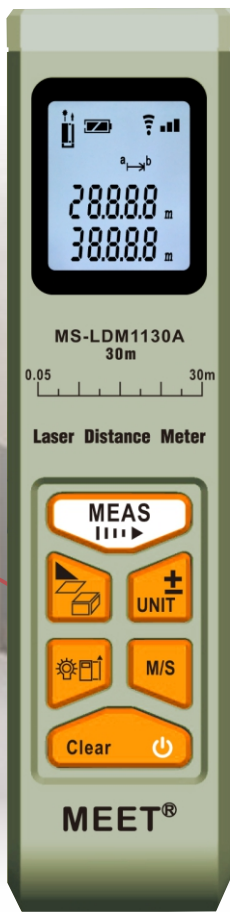




# Laser Distance Meter

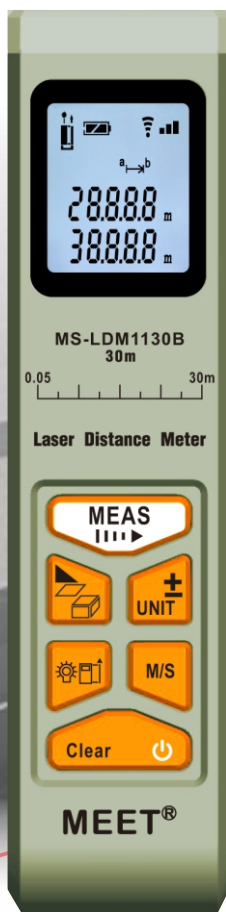

Model No.:MS-LDM1130A

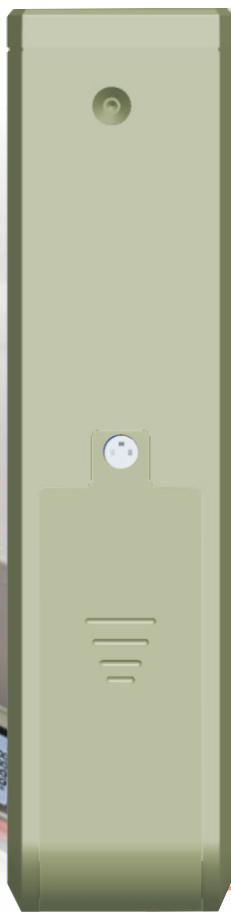

Model No.:MS-LDM1130B  
(with pocket clip)

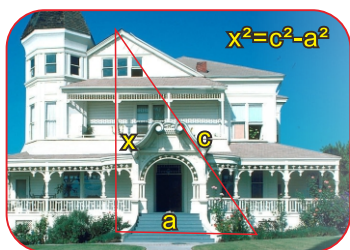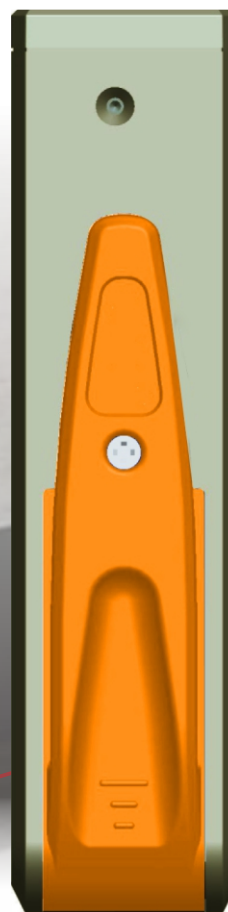

Pythagorean proposition measurement



Area / Volume measurement



Dynamic measurement



Height measurement

## Advance Features

Model No.	MS-LDM1130A	MS-LDM1130B
Measuring distance range	0.05 to 30M	
Display in two rows	*	
Accuracy	±1.5mm (±0.06 in)	
Unit conversion	m / in / ft	
Laser type	Class 2, 635 nm, < 1mW	
Laser beam	*	
Dynamic measurement	*	
Area / Volume measurement	*	
Pythagorean proposition measurement	*	
Indirect measurement	*	
Add / Subtract calculation	*	
Max. or Min. measurement display	*	
Historical storage memory	10	
Auto power off	2.5 minutes	
Front / Bottom measurement select	*	
Signal strength indicator	*	
Backlight ON / OFF select	*	
Buzzer sound	*	
Operating temperature	0°C to +40°C (32°F to 104°F)	
Storage temperature	-10°C to +50°C (14°F to 122°F)	
With pocket clip		*
Battery life (time) alkaline type (approx.)	>5000 (times)	
Battery powered	1.5V x 2 pieces AAA type (R03 / LR03)	
Dimension (L x W x D) mm	128x32x23	128x32x28



MEET INTERNATIONAL LTD. MANUFACTURER AND EXPORTER

Flat C, 11/F., China Trade Centre, 122-124 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong.

Tel : (852) 2950 4689 Fax : (852) 2763 9659 E-mail : sales@meet.com.hk

Website : www.meet.com.hk

www.globalsources.com/meetintl.co

www.meetusa.en.alibaba.com



CAT1615-LDM1130A/B